


# TREATMENT FLOW SHEET FOR MODULAR STP

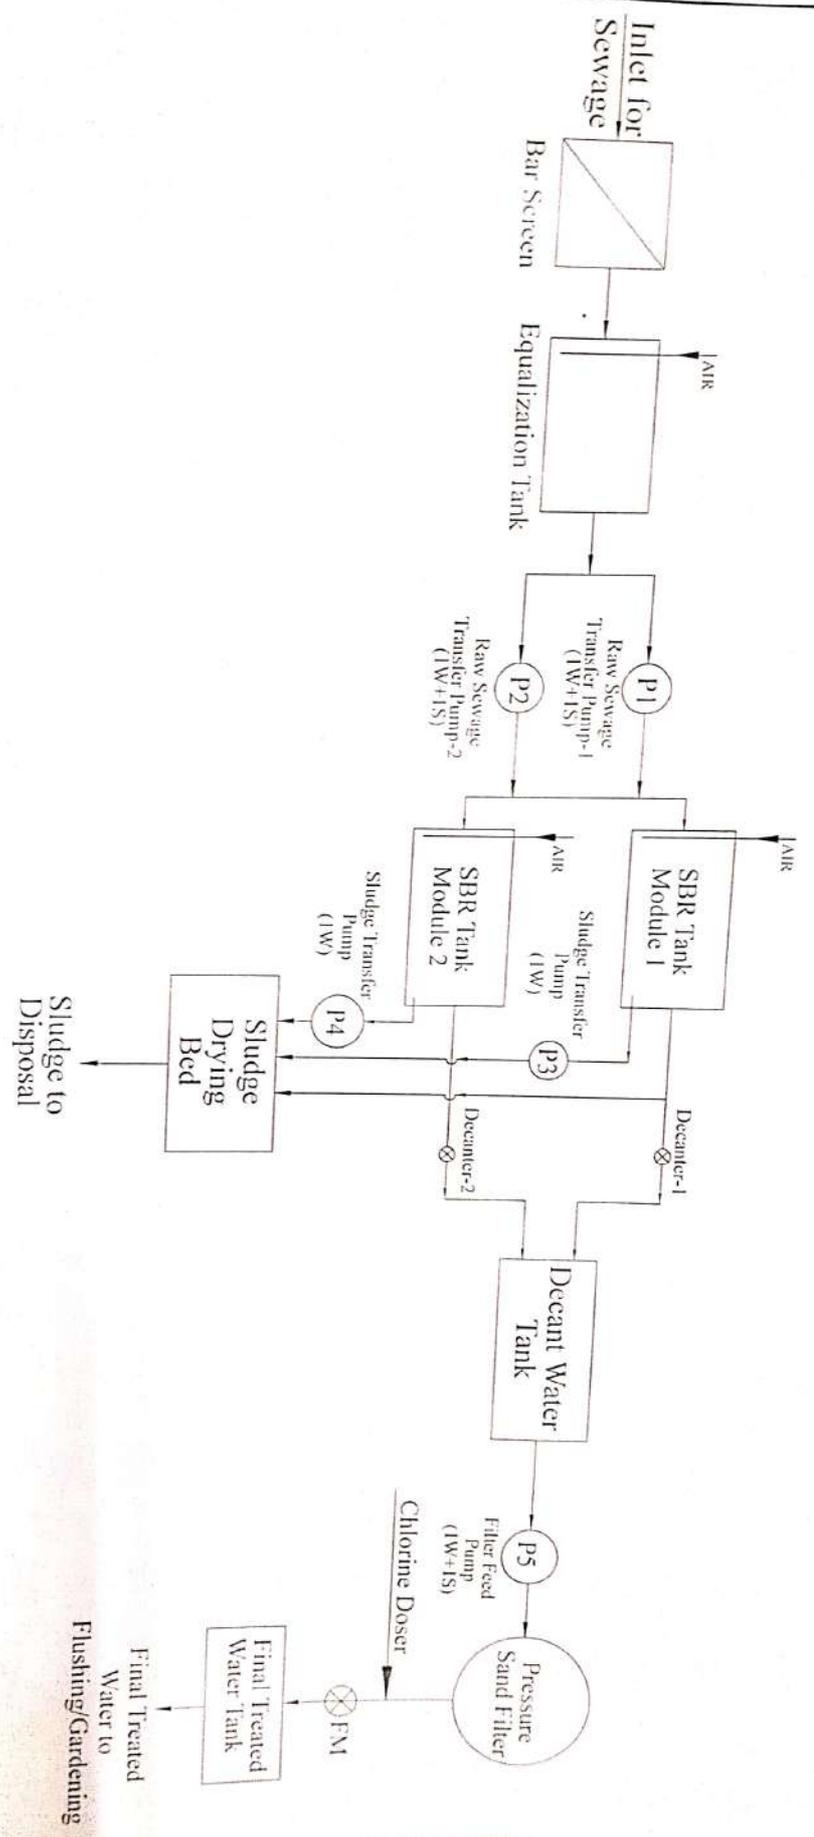


*M. S. Ranaiah*  
 M. S. Ranaiah College of Arts, Science &  
 Commerce, Autononomous  
 MSRIT P.O.S.F, MSR Nagar  
 Rengaluru - 560 054

*S. P. S.*  
 MAINTENANCE ENGINEER  
 GEF (GS BLOCK)


E-1381, 5th cross, 6th Main,  
 ATCS Layout, TTE Road,  
 Hoskote, Bangalore - 560 037  
 Tel: 080-41091115  
 SBR  
 Sewage Borehole Recharge

PROJECT	MSRIT
TITLE	250 KLD SEWAGE TREATMENT PLANT (125 X 2 MODULAR)
NO. OF TITLE	PROCESS FLOW DIAGRAM

# Ramaiah Campus Plan

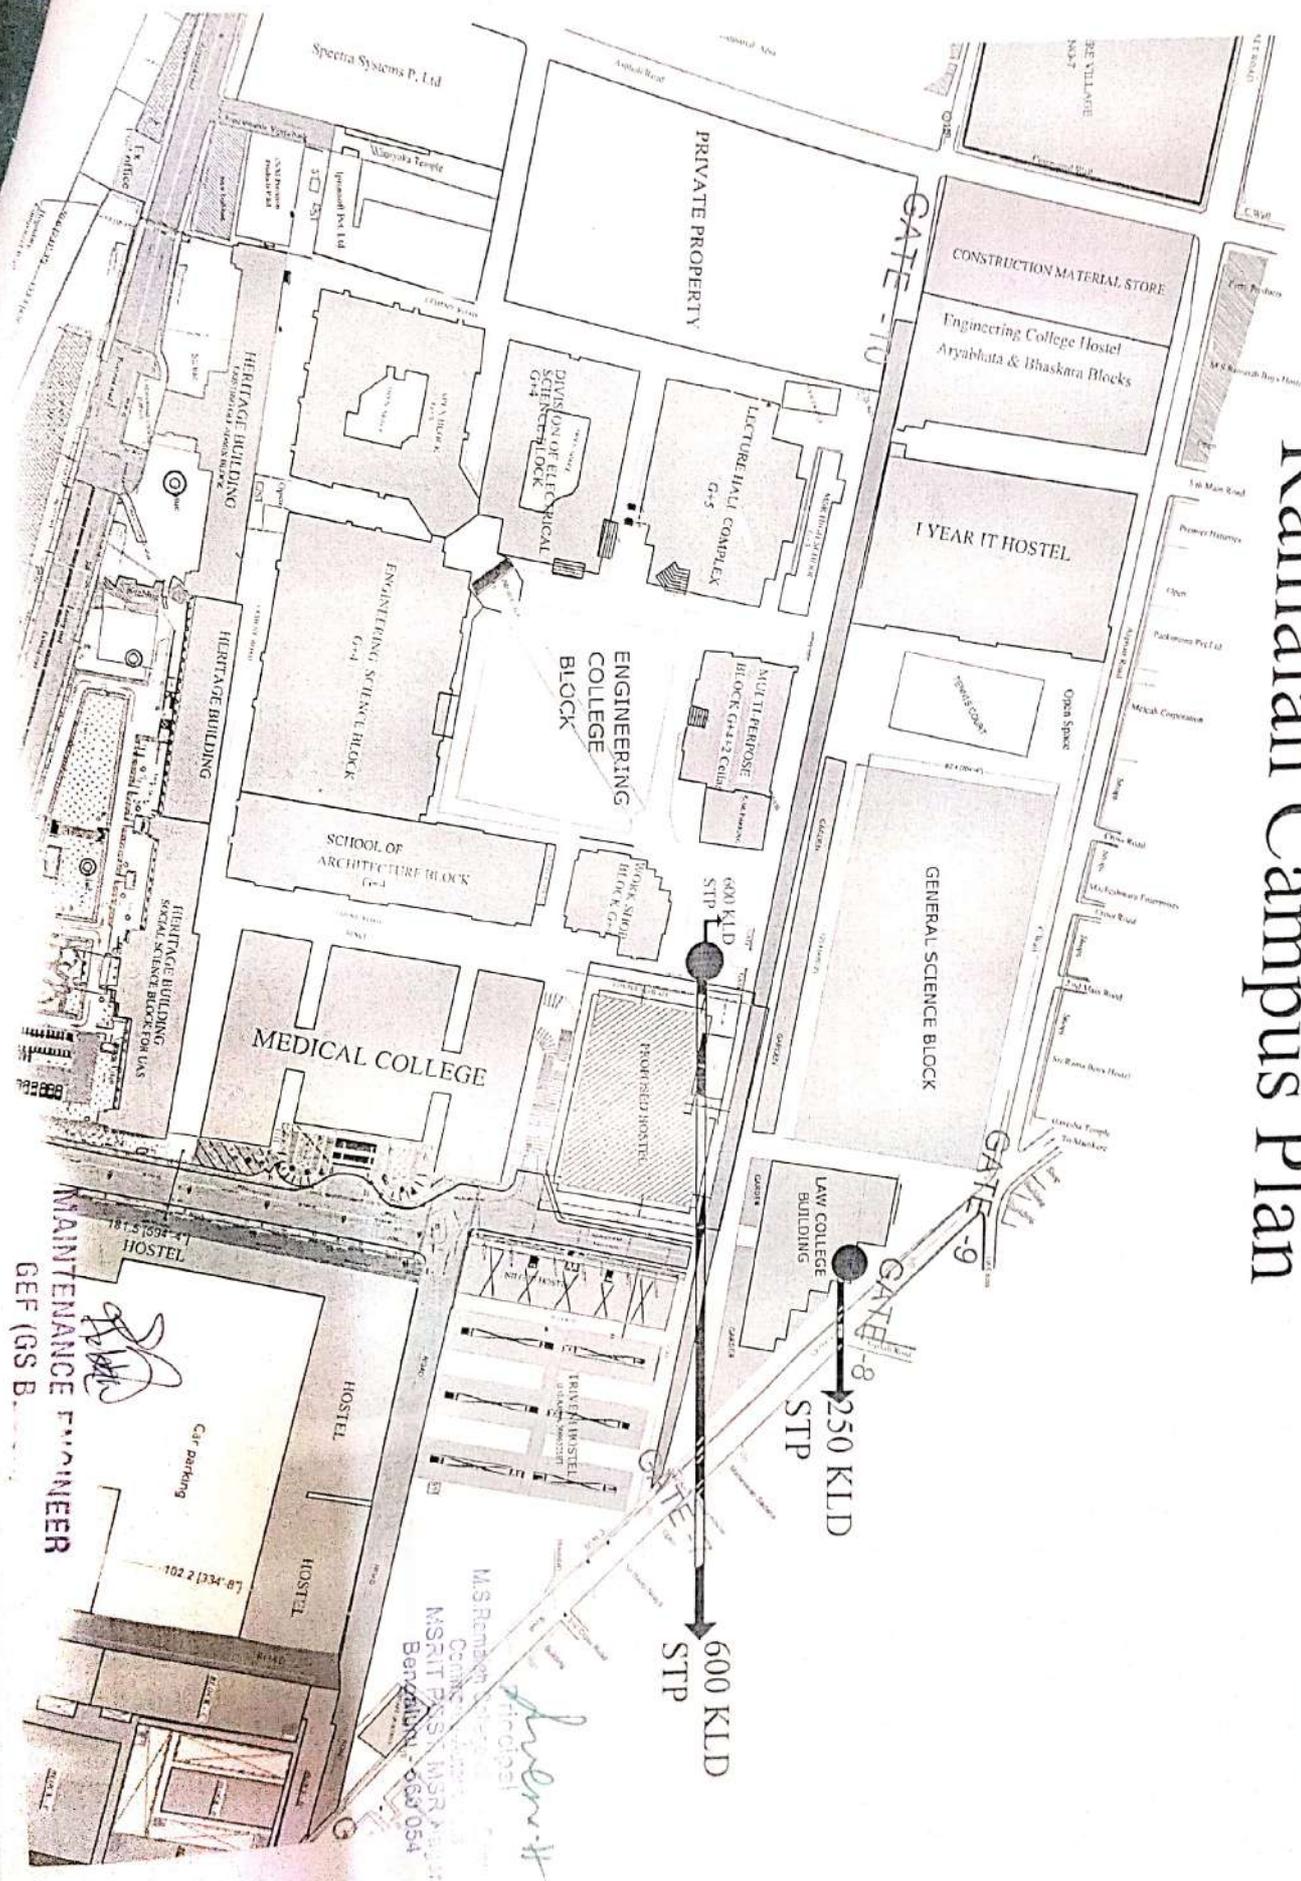

# Rain water collection well layout

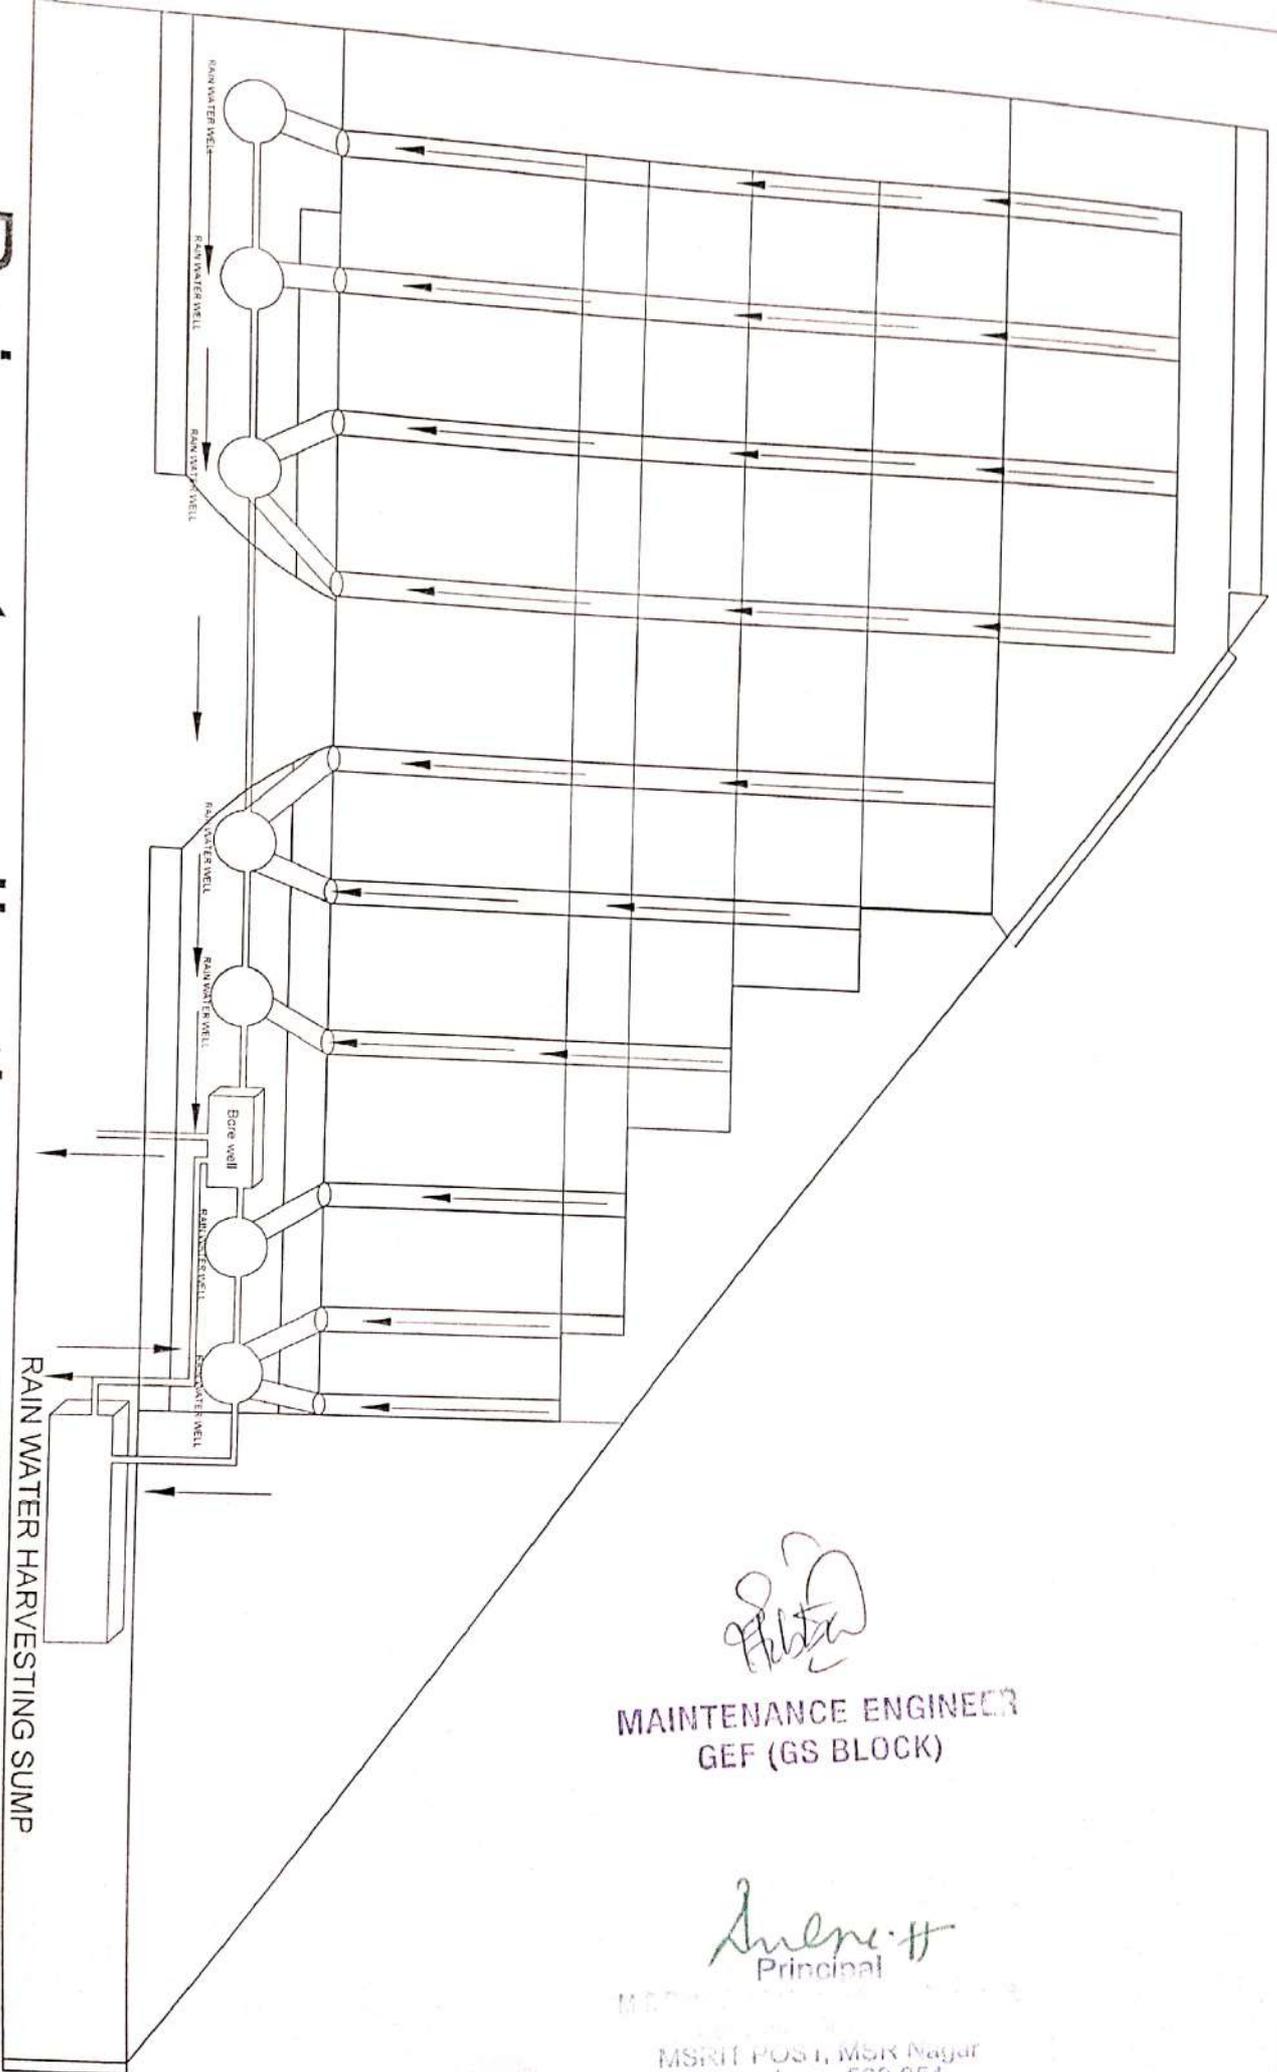

*[Signature]*  
MAINTENANCE ENGINEER  
GEF (GS BLOCK)

*[Signature]*  
Principal

MSRIT POST, MSR Nagar  
Bengaluru - 560 054



## Sewage treatment system certificate

### Preamble:

Water is a precious commodity. Most of the earth water is sea water. About 2.5% of the water is fresh water that does not contain significant levels of dissolved minerals or salt and two third of that is frozen in ice caps and glaciers. In total only 0.01% of the total water of the planet is accessible for consumption. Clean drinking water is a basic human need.

Unfortunately, more than one in six people still lack reliable access to this precious resource in developing world.

Sewage is 99 % water carrying wastes originating in urine and night soil. It contains waterborne pathogenic organisms from the night soil of already infected persons.

Sewage is a water-carried waste, in solution or suspension that is intended to be removed from a community. Also known as domestic or municipal wastewater, it is characterized by volume or rate of flow, physical condition, chemical and toxic constituents, and its bacteriologic status (which organisms it contains and in what quantities).

Sewage treatment is the process of removing contaminants from wastewater, primarily from household sewage. It includes physical, chemical, and biological processes to remove these contaminants and produce environmentally safe treated wastewater (or treated effluent). A by-product of sewage treatment is usually a semisolid waste or slurry, called sewage sludge, that has to undergo further treatment before being suitable for disposal or land application.

Every community produces liquid waste known as sewage. If untreated waste water is allowed to accumulate, the decomposition of organic materials it contains can lead to the production of large quantities of malodourous gases. In addition, untreated waste water usually contains nutrients which pathogenic microorganisms that dwell in the human intestinal tract. It also contains nutrients which can stimulate the growth of aquatic plants and it may contain toxic compounds. For these reasons the waste water should be treated and disposed hygienically which is desirable for any civilized society.

### Report:


The commissioning of Sewage treatment plant in the RIT Campus, MSR Nagar, Mathikere, Bangalore-54. The Design of 250KLD Sewage treatment plant based on advanced sequential batch reactor(SBR) technology which is controlled by Programmable logic controller(PLC).

The SBR treated water is disinfected using Sodium Hypochlorite and filtered through a pressure sand filter. The final treated water will be stored for recycling for gardening purpose and Toilet flush purpose. The waste sludge is used as manure after dewatering through sludge drying beds.

The process of BOD removal, nitrification/de-nitrification, phosphorus removal and sludge separation are achieved continuously in a single SBR tank. The process operates on the continuous inflow and batch outflow principle. The phases of aeration, settling, decantation occur sequentially and are controlled by a PLC.

Sewage from pre-aeration tank flows through openings at the bottom of the baffle wall and into the main aeration tank where BOD removal and nitrification occur. After aeration phase, sludge separation occurs in the settling phase. After settling, the clear water from top is removed through a PLC operated decanter. De-nitrification occurs during anoxic periods of settling and decant phases. The excess sludge is wasted during decant phase.

  
Principal  
M.S.Ramaiah College of Arts, Science &  
Commerce-Autonomous  
MSRIT POST, MSR Nagar  
Bengaluru - 560 054


  
MAINTENANCE ENGINEER  
GEF (GS BLOCK)

The tank is divided into pre-aeration and main aeration tanks by a baffle wall with openings at the bottom. The sewage flows continuously into the pre-aeration tank, which acts as a biological selector enhancing the growth of the most desirable organisms while limiting the growth of filamentous bacteria.

Treatment of sewage is absolutely necessary for making the inland water bodies clean and to reuse the treated water for toilet flushing and gardening purposes. Under section 24 of water pollution (Prevention & control) act 1974, the government authorities can prohibit the disposal waste water into UGD. Therefore, it is mandatory to set up STP by the institutions for bridging the treatment gap and also to conserve the water.

This inventory of STP would be helpful to MSR group institutions in formulating action plan for development of Green Campus.

The daily process of 250 KLD Sewage treatment plant

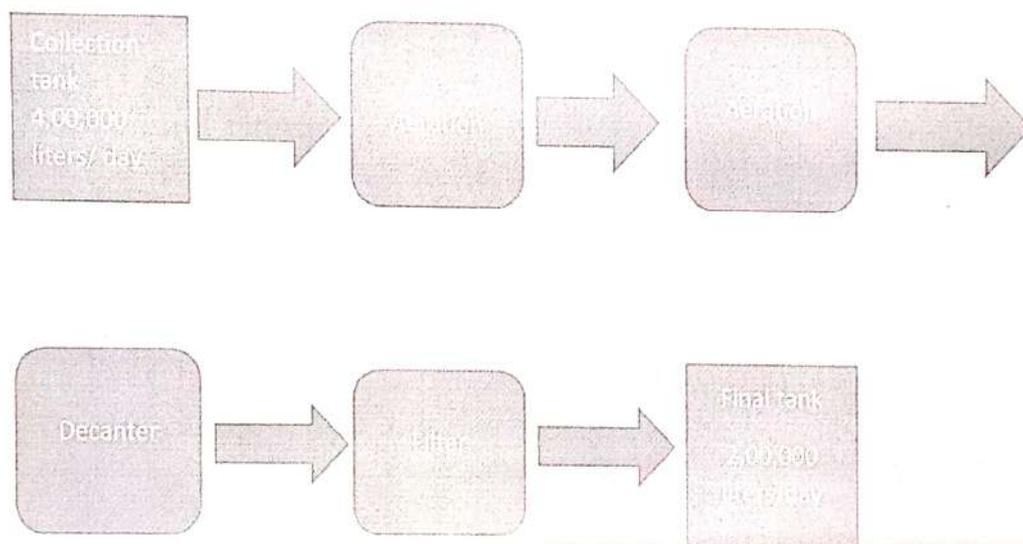

Final treated water has been tested through Labs:

- 1) We get the PH Value as per IS:3025/PART -11 = 7.35
- 2) Total Suspended solids as per IS :3025/PART -17 = 13.6 mg/L
- 3) Biochemical Oxygen Demand ( 3 days @ 27 c) as per IS:3025/PART-44 = 6.8 mg/L
- 4) Chemical Oxygen demand as per IS:3025/PART -58 = 36.9 mg/L
- 5) Total Nitrogen as per IS:3025/PART - 34 = 7.6 mg/L
- 6) Ammoniac Nitrogen as per IS: 3025/PART-34 = 1.3 mg/L
- 7) Fecal coliform as per IS 1622- 1981 = 50MPN/100ml

*Sulene H*  
Principal  
M.S.Ramalah College of Arts, Commerce &  
Commerce-Autonomous  
MSRIT POST, MSR Nagar  
Bengaluru - 560 054

*[Signature]*  
MAINTENANCE ENGINEER  
G/ (BLOCK)

## WASTE TREATMENT CALCULATION:

Evaluation of Sewage treatment plant

Capacity Metric : Capacity Ratio =  $\frac{\text{Total STP Capacity (MLD)}}{\text{Total Daily Wastewater generation}}$

Total Daily Wastewater generation

$$= \frac{2,50,000 \text{ Litres}}{4,00,000 \text{ Litres}}$$


$$= \frac{0.25 \text{ (MLD)}}{0.40 \text{ (MLD)}}$$

$$= 0.625 \text{ (MLD)}$$

## 2. Evaluation Criteria

The resulting value of this ratio indicates the plant's operational status:

- **Ratio > 1.0 (Adequate/Safety Margin):** Indicates the plant has a buffer to handle peak flows and future growth. Standard design often aims for a 10–20% **safety margin**, leading to a targeted ratio of roughly 1.1 to 1.2.
- **Ratio = 1.0 (At Capacity):** The plant is operating exactly at its designed limit. This is risky because it lacks a buffer for Peak Flow Factors (surges during morning/evening) or infiltration from rainwater.
- **Ratio < 1.0 (Undersized/Overloaded):** Indicates a "treatment gap." For example, a 2021 CPCB report noted India generated 72,368 MLD but only had 31,841 MLD capacity (Ratio  $\approx$  0.44), leading to untreated discharge.




Principal  
M.S.Ramaiah College of Arts, Science &  
Commerce-Autonomous  
MSRIT POS I, MSR Nagar  
Bengaluru - 560 054



MAINTENANCE ENGINEER  
GEF (GS BLOCK)



# TREATMENT FLOW SHEET FOR MODULAR STP

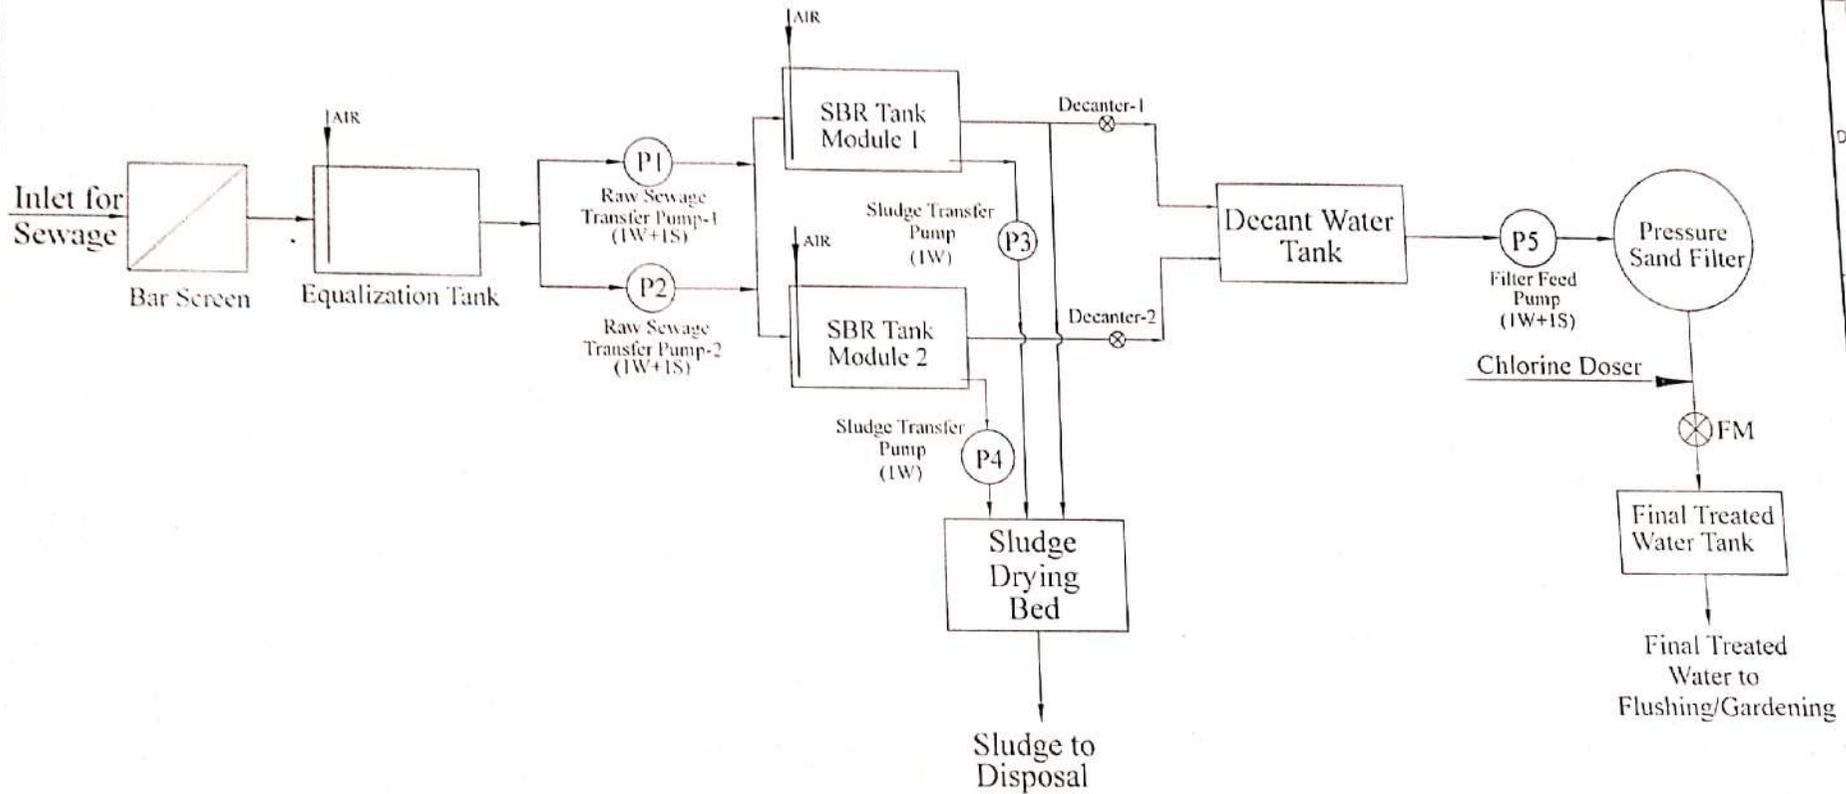


*[Signature]*  
 M.S.Ramaiah College of Arts, Science &  
 Commerce - Autonomous  
 MSRIT POS I, MSR Nagar  
 Bengaluru - 560 054

*[Signature]*  
**MAINTENANCE ENGINEER**  
 GEF (GS BLOCK)


 Living It Right	E-1381, 5th cross, 6th Main, AECS Layout, ITPL Road, Brookfields, Bangalore - 560 037 Tele Fax: +91 80 41705115	brookfield <b>SBR</b> Advanced Wastewater Recycling
	PROJECT: MSRIT TITLE: 250 KLD SEWAGE TREATMENT PLANT ( 125 x 2 MODULAR ) SUB-TITLE: PROCESS FLOW DIAGRAM	

# Ramaiah Campus Plan

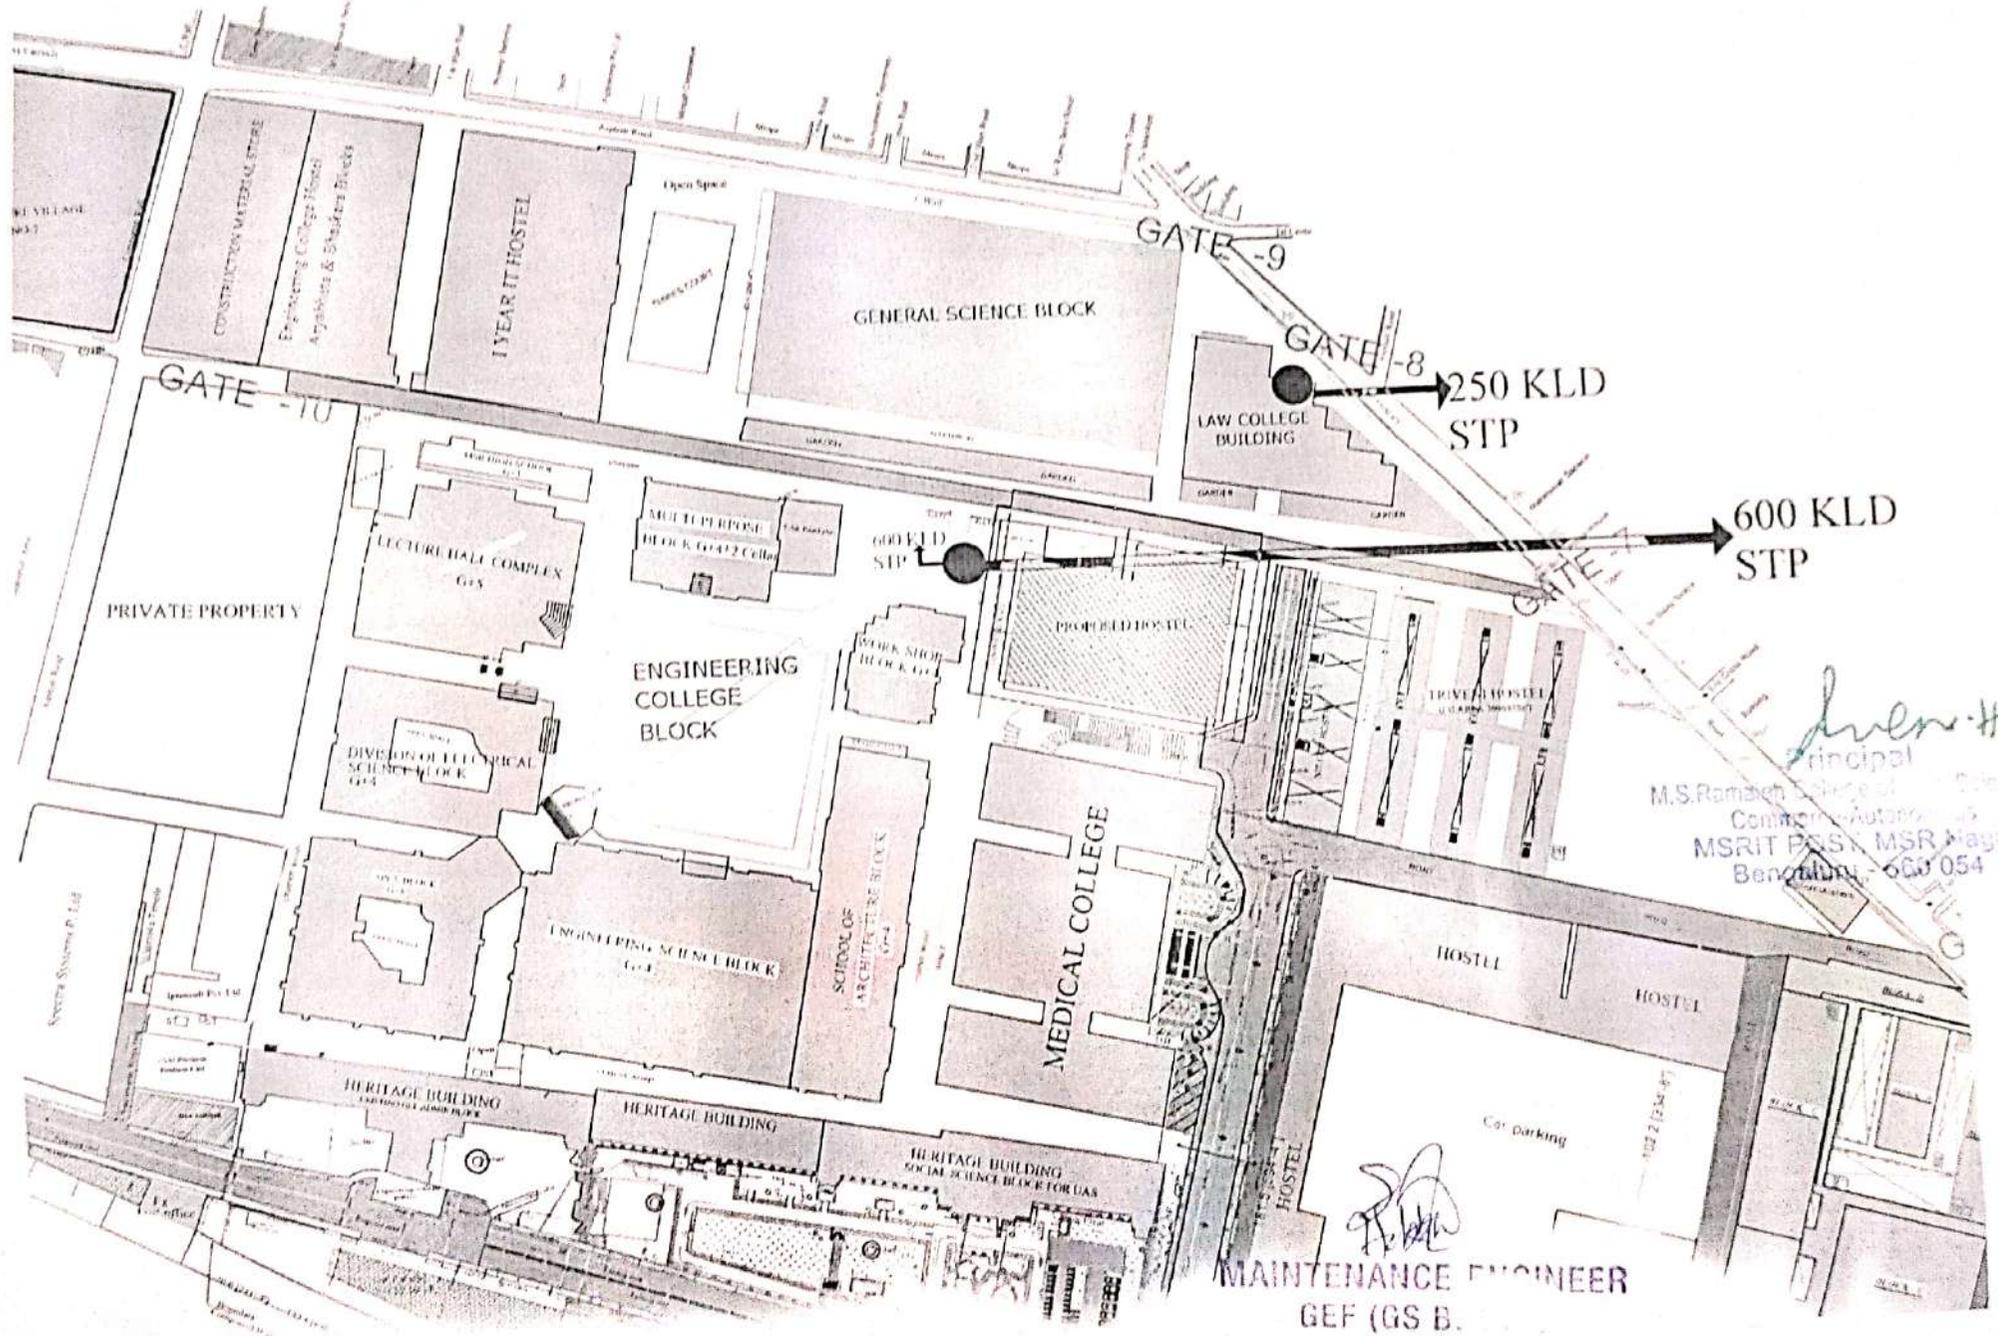


*M.S. Ramiah*  
Principal  
M.S. Ramiah College of Engineering  
Common Autonomous  
MSRIT P.O., MSR Nagar  
Bengaluru - 560 054

*[Signature]*  
MAINTENANCE ENGINEER  
GEF (GS B.)

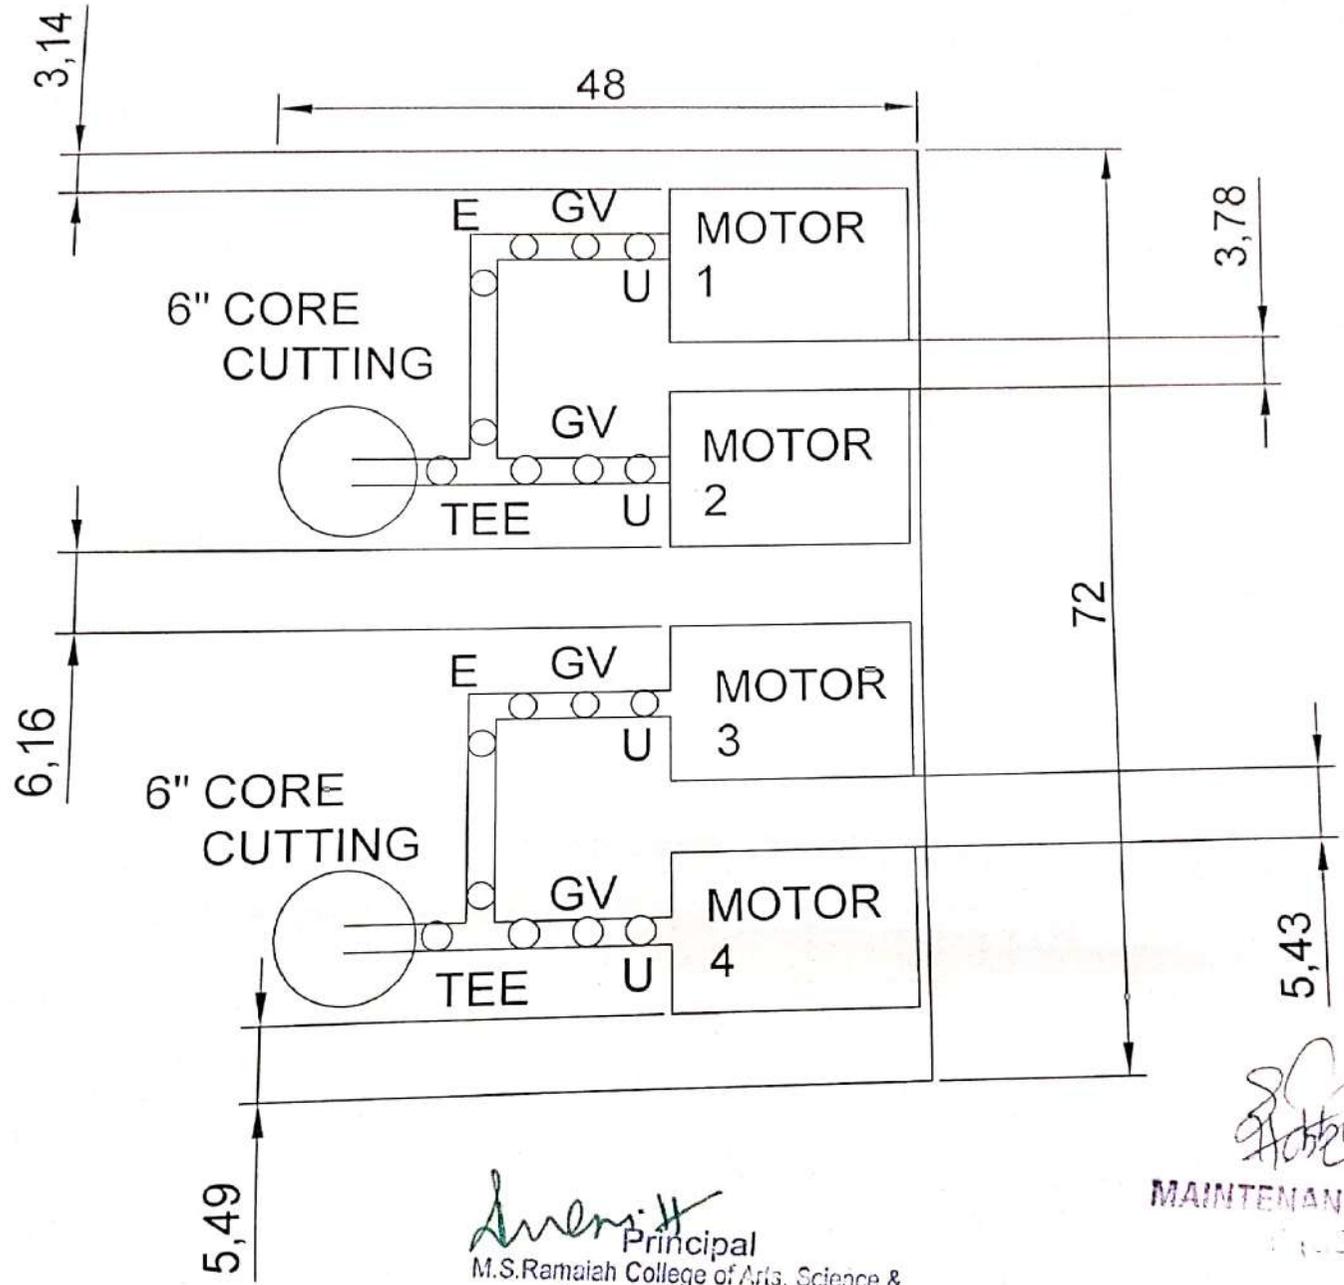


*Suresh H*  
Principal  
M.S.Ramaiah College of Arts, Science &  
Commerce-Autonomous  
MSRIT POST, MSR Nagar  
Bengaluru - 560 054

*[Signature]*  
MAINTENANCE ENGINEER  
P.S. DEPT

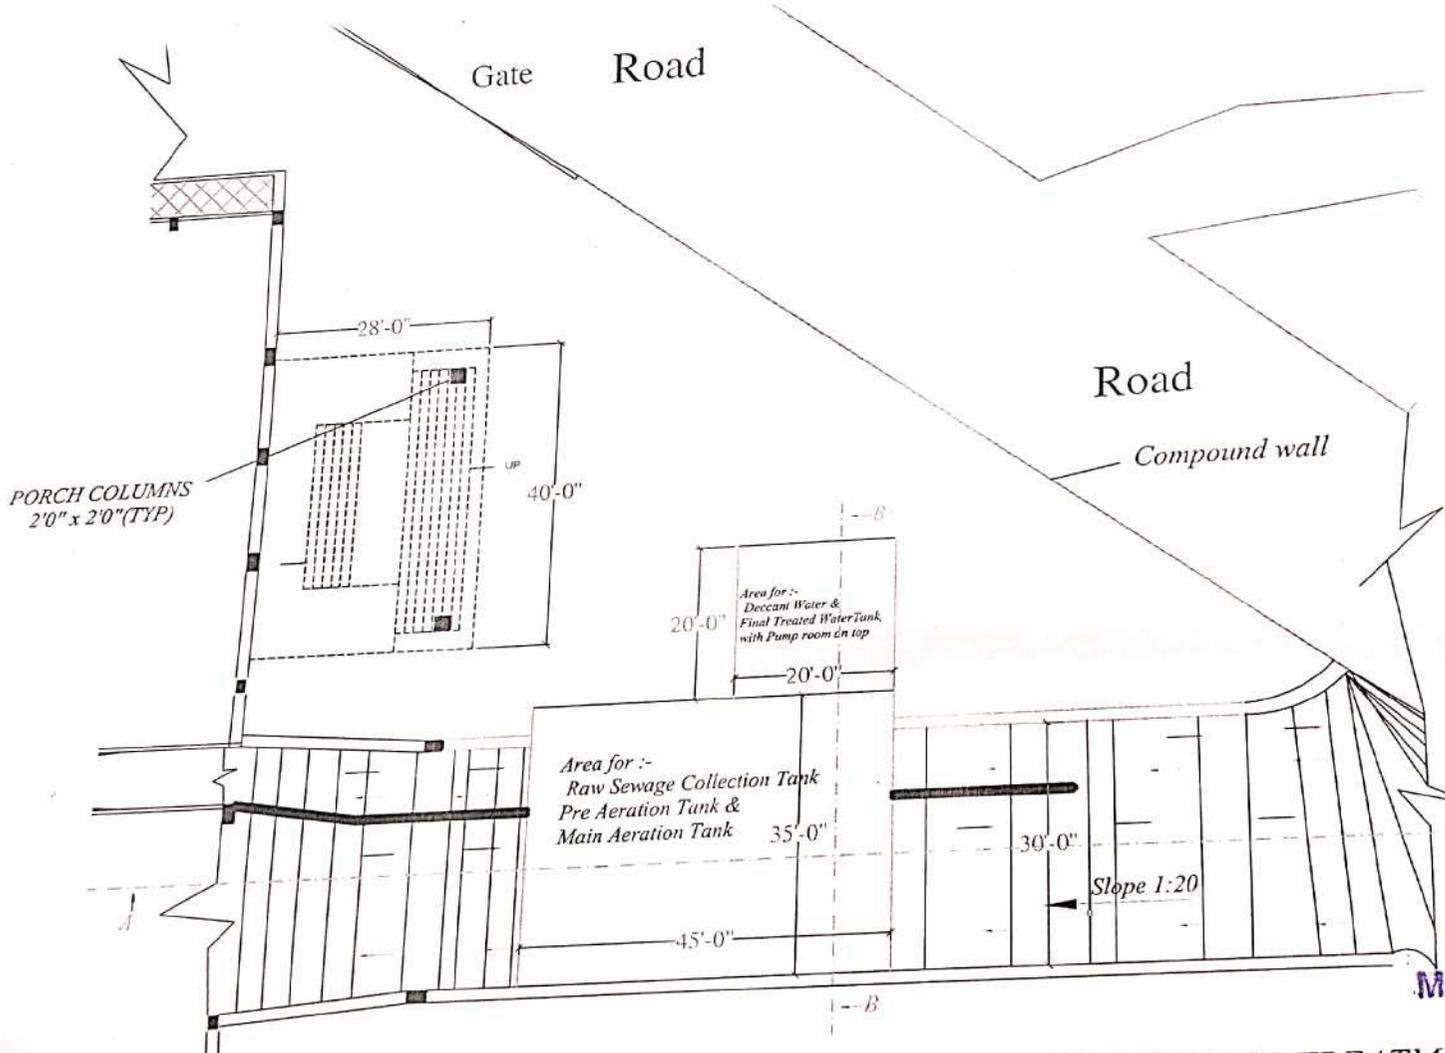

Principal  
 M.S.Ramaiah College of Arts, Science &  
 Commerce - Autonomous  
 MSRIT POST, MSR Nagar  
 Bengaluru - 560 054



MAINTENANCE ENGINEER,  
 (GE (GS BLOCK))

PLAN SHOWING RAMP LOCATION & AREA FOR PROPOSED SEWAGE TREATMENT PLANT

PRODUCED BY AN AUTODESK STUDENT VERSION

PRODUCED BY AN AUTODESK STUDENT VERSION

MAINTENANCE ENGINEER  
 (GE (GS BLOCK))

MSRIT POST, MSR Nagar  
 Bengaluru - 560 054

Gokula Education Foundation(Engineering and Science)

M.S. Ramaiah college of Arts, Science and Commerce

Report on Rain Water Harvesting

Ramaiah College of Arts, Science and Commerce is situated in RIT Campus, Gokula Education Foundation, MSR Nagar, Mathikere, Bangalore-54.

Preamble :

Rainwater harvesting (RWH) is the collection and storage of rain, rather than allowing it to run off. Rainwater is collected from a roof-like surface and redirected to a tank, cistern, deep pit (well, shaft, or borehole), aquifer, or a reservoir with percolation, so that it seeps down and restores the ground water. Dew and fog can also be collected with nets or other tools. Rainwater harvesting differs from storm water harvesting as the runoff is typically collected from roofs and other surfaces for storage and subsequent reuse. Its uses include watering gardens, livestock, irrigation, domestic use with proper treatment, and domestic heating. The harvested water can also be committed to longer-term storage or groundwater recharge.

Rainwater harvesting is one of the simplest and oldest methods of self-supply of water for households, having been used in South Asia and other countries for many thousands of years. Installations can be designed for different scales including households, neighbourhoods and communities and can also be designed to serve institutions such as schools, hospitals and other public facilities

Report :


Ramaiah College of College of Arts, Science and Commerce is a standalone building which has 8 floors and around 3,387sft garden area, where provision is available to harvest rain water with roof top around 70,952sft. Bangalore has the annual rainfall of 1004.6mm and the rainy season extends to past 1 year.

Ramaiah College of Arts, Science and Commerce has sufficient roof area and the rain water is estimated taking concrete as impervious layer. The open garden area and park area also contributes rain water taking seepage factor. Ramaiah College of Arts, Science and Commerce has rain water harvesting tank and the rainwater harvesting system tank gets collected the rain water that flows from drainage, terrace, garden and park area. The Collected rain water is used for gardening purposes; whenever excess rain happens the overflow from the rainwater harvesting tank is directed to infiltration wells which are very near to bore wells. The rain water gets infiltrated into the ground and recharges the bore wells.

Also a new collection tank to collect excess rain water near alumni building is constructed and subjected to sedimentation, filtration and disinfection. The treated rain water is proposed to be used for domestic purposes particular in wash rooms.



MAINTENANCE ENGINEER  
GEF (GS BLOCK)



Principal  
M.S.Ramaiah College of Arts, Science &  
Commerce-Autonomous  
RIT Campus, MSR Nagar,  
Bangalore - 560 054



Water Management:

Assessment of Rainwater Harvesting potential :

Harvestable potential = Total catchment area (m<sup>2</sup>) x Average Annual Rainfall (m) x Runoff Coefficient

$$V = A \times R \times C$$


- 1) Average rainfall = 1004.6mm
- 2) Total area of building = 6,591 m<sup>2</sup>
- 3) Coefficient = 0.85


$$\begin{aligned} V &= 6591 \times 1004.6 \times 0.85 \\ &= 5628.12 \text{ m}^3 \\ &= 56,28,120 \text{ litres} \end{aligned}$$

Rainwater Harvesting :

In campus we have the Rainwater storage sump and Rainwater storage pit, which has the capacity 5,00,000 litres and 14,934 litres pit 14nos inside the campus, which can save almost 6,49,340 litres during the Rainwater and it also acts as an Rechargeable bodies for ground water bore wells. Rainwater stocked also used for garden purposes during the water scarcity.

  
MAINTENANCE ENGINEER  
GEF (GS BLOCK)


  
Principal  
M.S.Ramiah College of Arts, Science &  
Commerce-Autonomous  
MSRIT POST, MSR Nagar  
Bengaluru - 560 054

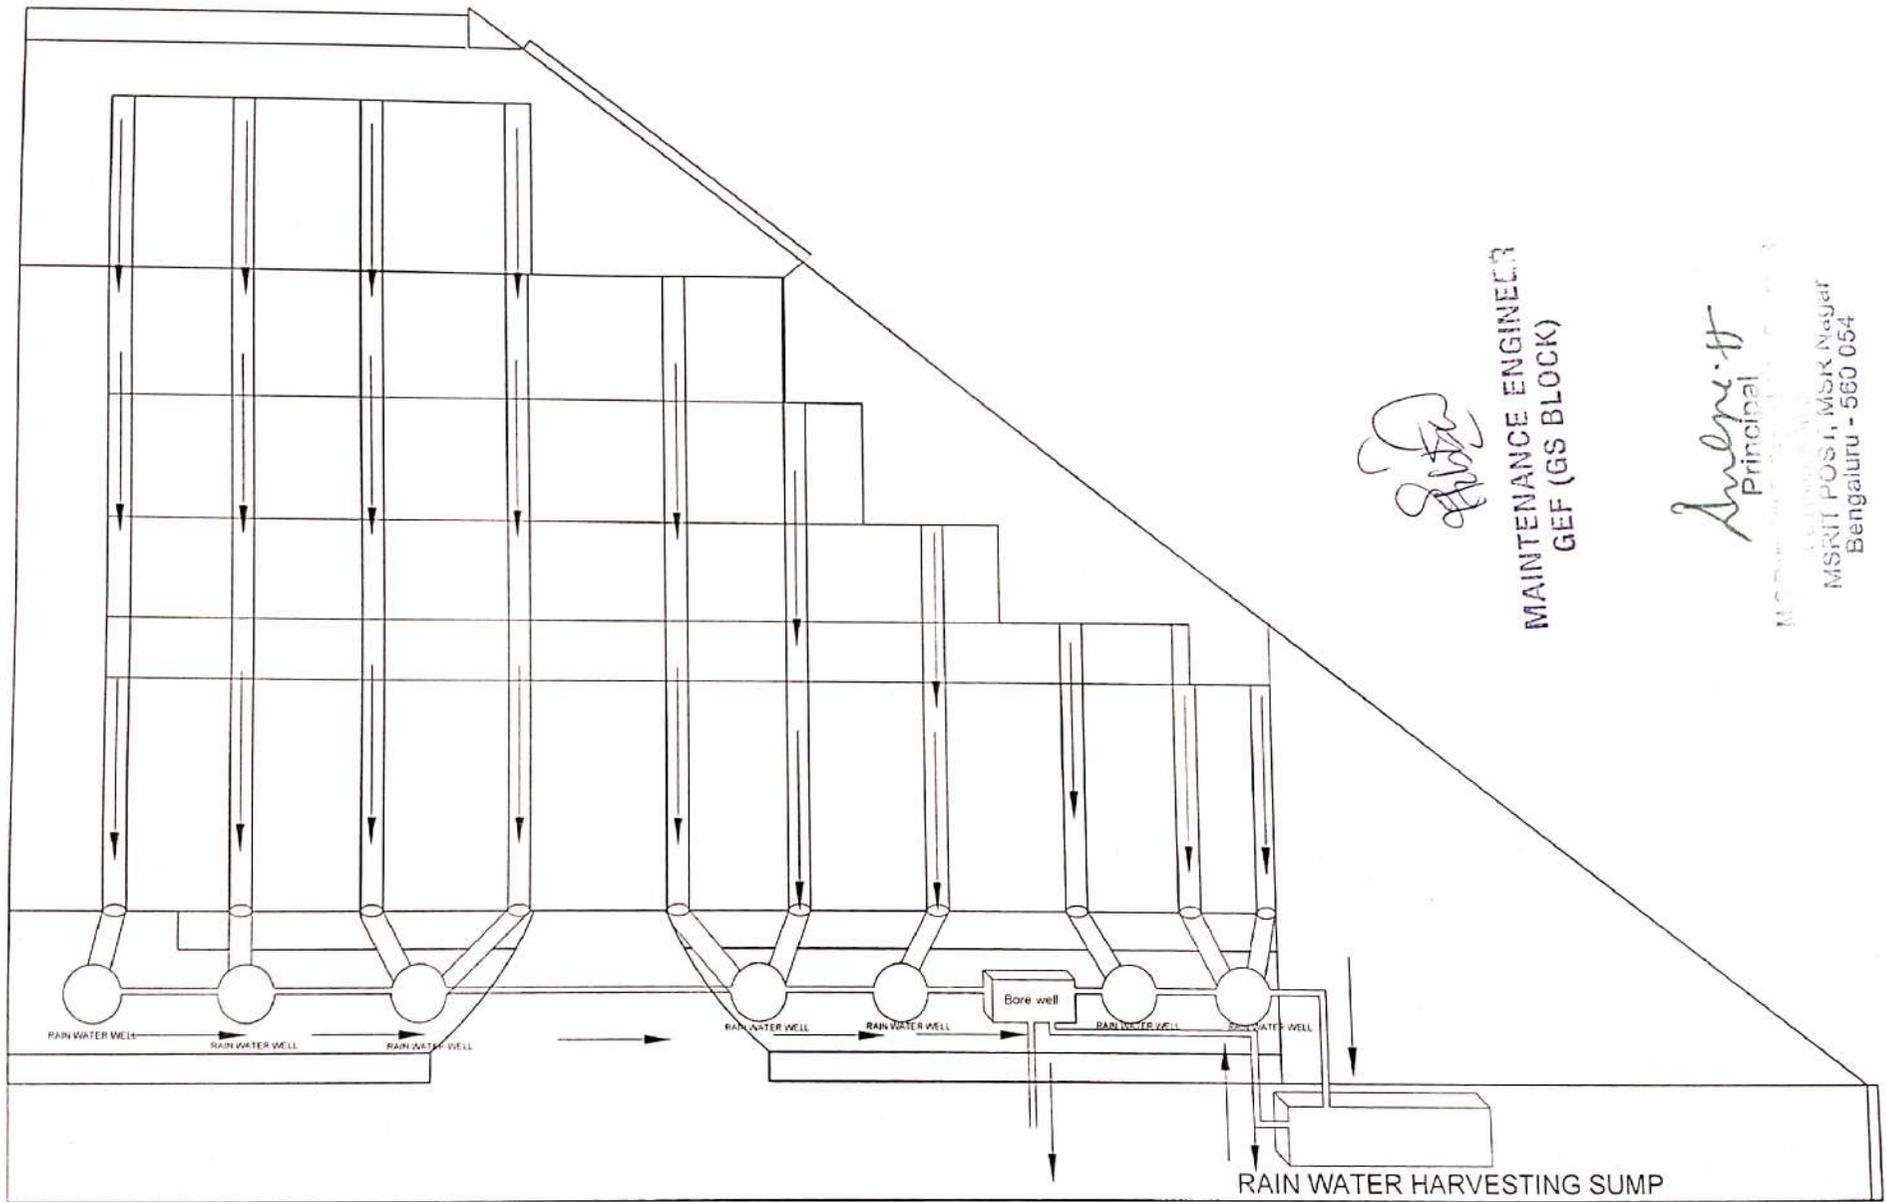

  
 MAINTENANCE ENGINEER  
 GEF (GS BLOCK)

  
 Principal  
 MSRIT POST, MSR Nagar  
 Bengaluru - 560 054


Rain water collection well layout

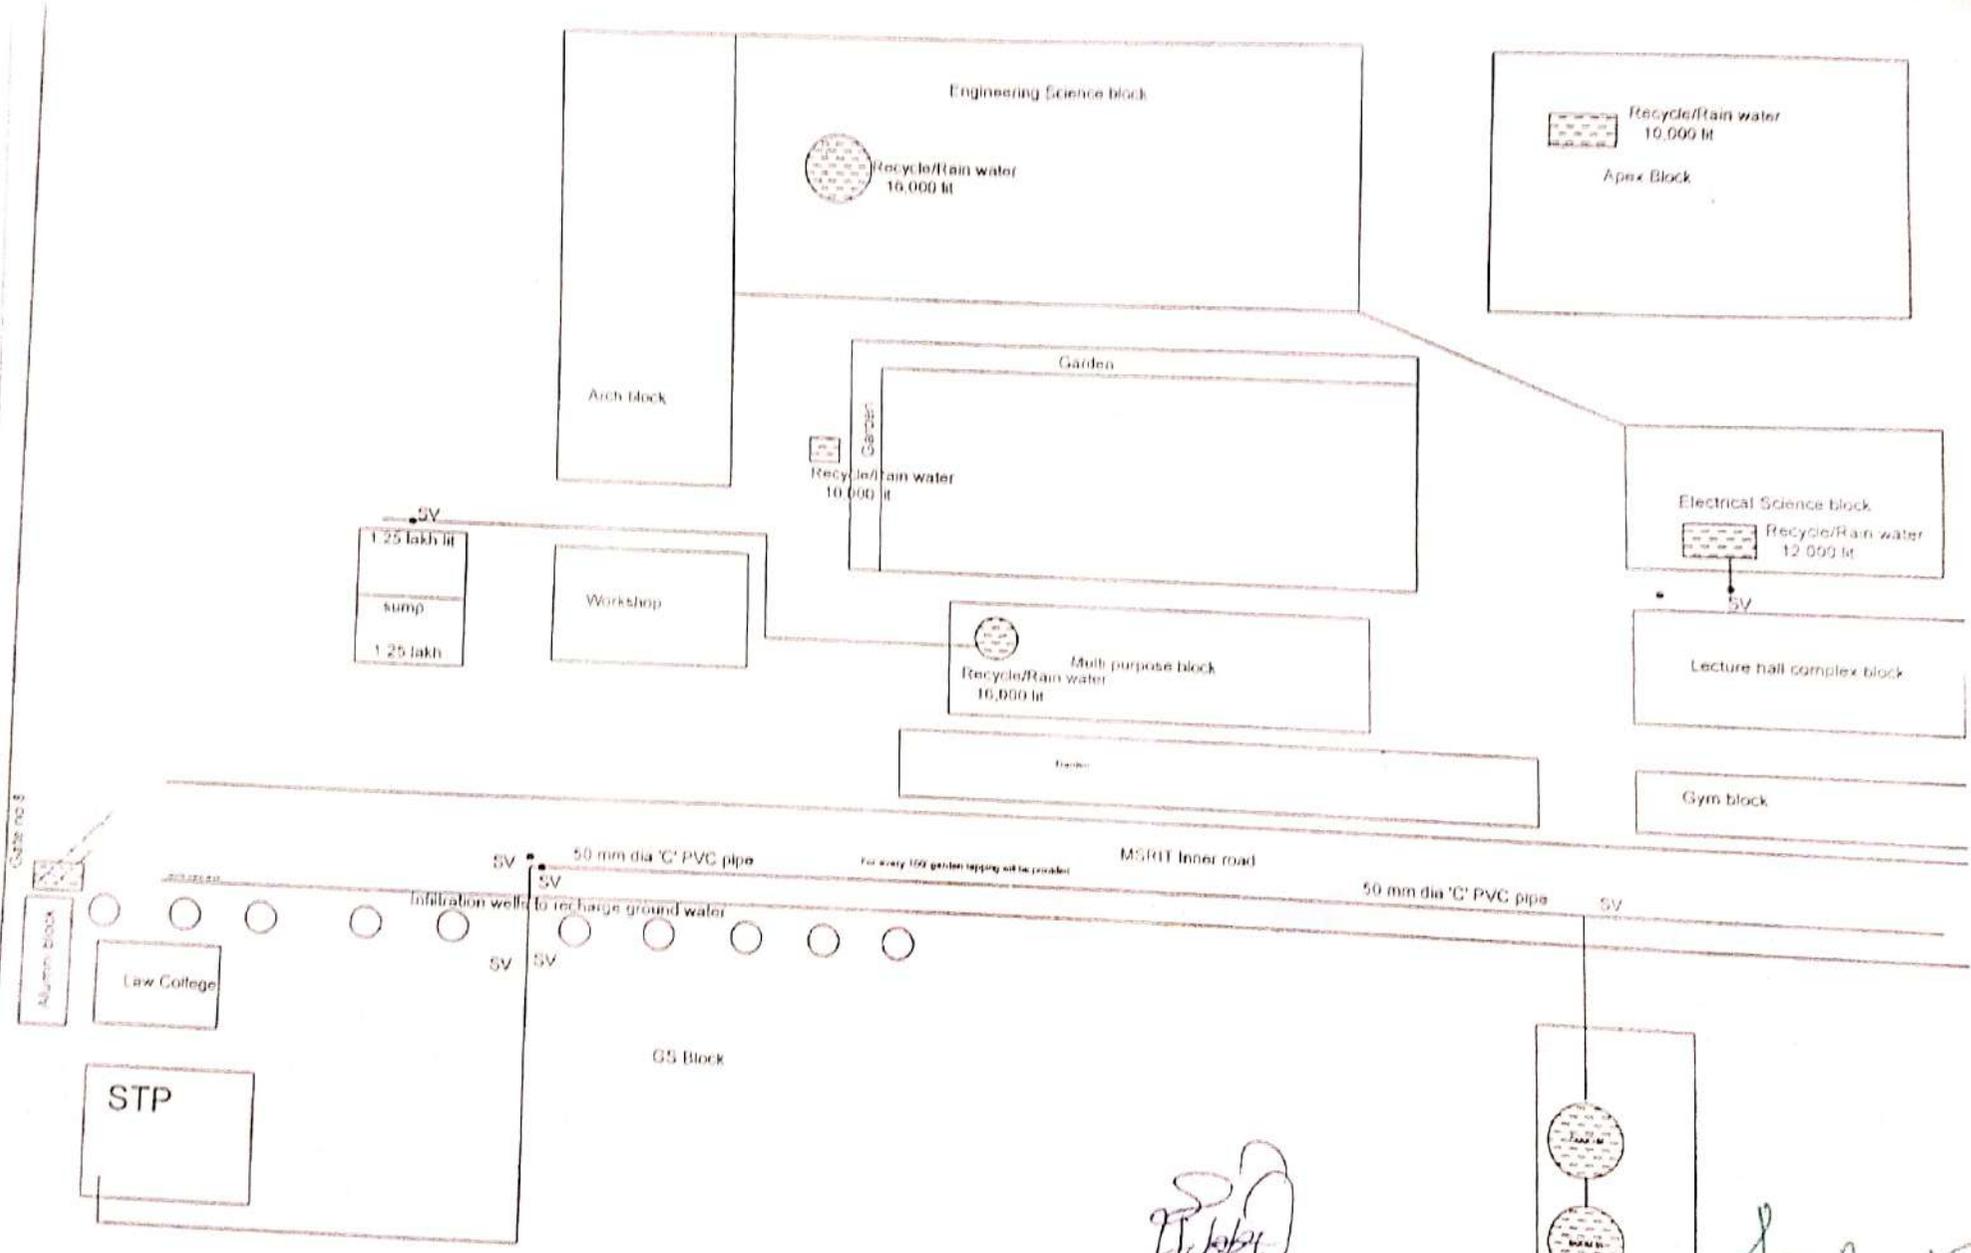

Cable no. 8

*Handwritten signature*

**MAINTENANCE ENGINEER  
GEF (GS BLOCK)**

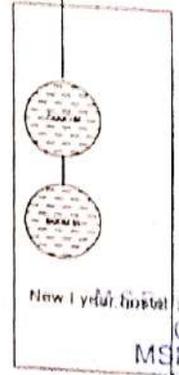

New 1 year

*Handwritten signature*  
Principal

MSRIT College of Arts, Science &  
Commerce-Autonomous  
MSRIT POS I, MSR Nagar  
Bengaluru - 560 054



# SLN TESTING LABORATORY PRIVATE LIMITED

Recognized by MOEF & CC , ISO 9001:2015 , ISO14001:2015 ,  
ISO 45001:2018 & GLP Certified Laboratory



NO.23, JDN Layout, 10<sup>th</sup> Cross , Raghavendra Industrial Area , Thigalarapalya Main Road,  
Peenya 2<sup>nd</sup> Stage , Bengaluru - 560058, Karnataka, India.

Mob : 9538888098 , 9538888097, E - mail: info@slnlabs.com , Web : www.slnlabs.com

## TEST REPORT

Page No. 1 of 1

<b>Report No :</b> SLNLT25001200950	<b>Report Date :</b> 18/12/2025
<b>Issued To:</b> M/s. MSR IT 144, 2JRF+RGJ Doctor, 144, Outer Ring Rd, MS Ramaiah North City, Manayata Tech Park, Nagavara, Bengaluru, Karnataka 560045.	<b>Customer Reference :</b> Verbal
	<b>Date of Receipt :</b> 15/12/2025
	<b>Date of test start :</b> 15/12/2025
<b>Vendor Name:</b> M/s. Brookfield Technologies Pvt. Ltd. Bangalore.	<b>Date of Completion of test :</b> 18/12/2025
	<b>Sample Particulars :</b> STP Treated Water-250 KLD

Sl. No	Parameters	Test Method	Units	Results	KSPCB Standard
01	pH Value	IS:3025/Part-11	---	7.55	6.5 - 9.0
02	Total Suspended Solids	IS:3025/Part-17	mg/L	8.3	20 Max
03	Biochemical Oxygen Demand (3days @27°C)	IS:3025/Part-44	mg/L	4.0	10 Max
04	Chemical Oxygen Demand	IS:3025/Part-58	mg/L	28.9	50 Max
05	Total Nitrogen	IS:3025/Part-34	mg/L	6.3	10 Max
06	Ammonical Nitrogen	IS:3025/Part-34	mg/L	<1.0	5 Max
07	Fecal Coliform	IS 1622-1981	MPN/100ml	11	100 Max

**Inference:** As per KSPCB Standards, The above tested results are within the standards.

\*\*\*\*\*End of the Report\*\*\*\*\*



Authorised Signatory

- Note :**
1. The results listed pertain only to the tested samples and applicable parameters.
  2. Samples will be destroyed after 15 days from the date of issue of test certificates unless & otherwise specified and all perishable samples will be destroyed immediately after tests conducted.
  3. This report is not be reproduced either wholly or in part and can not be used an evidence in the count of law and should not be used in any advertising media without prior written permission.
  4. Sampling not done by us, unless specified.



# SLN TESTING LABORATORY PRIVATE LIMITED

Recognized by MOEF & CC , ISO 9001:2015 , ISO14001:2015 ,  
ISO 45001:2018 & GLP Certified Laboratory



NO.23, JDN Layout, 10<sup>th</sup> Cross , Raghavendra Industrial Area , Thigalarapalya Main Road,  
Peenya 2<sup>nd</sup> Stage , Bengaluru - 560058, Karnataka, India.

Mob : 9538888098 , 9538888097 , E - mail: info@slnlabs.com , Web : www.slnlabs.com

## TEST REPORT

Page No. 1 of 1

<b>Report No :</b> SLNLT2600101875L	<b>Report Date :</b> 31/01/2026
<b>Issued To:</b> M/s. MSR IT 144, 2JRF+RGJ Doctor, 144, Outer Ring Rd, MS Ramaiah North City, Manayata Tech Park, Nagavara, Bengaluru, Karnataka 560045.	<b>Customer Reference :</b> Verbal
	<b>Date of Receipt :</b> 28/01/2026
	<b>Date of test start :</b> 28/01/2026
<b>Vendor Name:</b> M/s. Brookfield Technologies Pvt. Ltd. Bangalore.	<b>Date of Completion of test :</b> 31/01/2026
	<b>Sample Particulars :</b> STP Treated Water-250KLD

<u>Sl. No</u>	<u>Parameters</u>	<u>Test Method</u>	<u>Units</u>	<u>Results</u>	<u>KSPCB Standard</u>
01	pH Value	IS:3025/Part-11	---	7.69	6.5 - 9.0
02	Total Suspended Solids	IS:3025/Part-17	mg/L	5.2	20 Max
03	Biochemical Oxygen Demand (3days @27°C)	IS:3025/Part-44	mg/L	3.0	10 Max
04	Chemical Oxygen Demand	IS:3025/Part-58	mg/L	20.0	50 Max
05	Total Nitrogen	IS:3025/Part-34	mg/L	5.0	10 Max
06	Ammonical Nitrogen	IS:3025/Part-34	mg/L	<1.0	5 Max
07	Fecal Coliform	IS 1622-1981	MPN/100ml	<2	100 Max

**Inference:** As per KSPCB Standards, The above tested results are within the standards.

\*\*\*\*\*End of the Report\*\*\*\*\*



  
Authorized Signatory

- Note :**
1. The results listed pertain only to the tested samples and applicable parameters.
  2. Samples will be destroyed after 15 days from the date of issue of test certificates unless & otherwise specified and all perishable samples will be destroyed immediately after tests conducted.
  3. This report is not be reproduced either wholly or in part and can not be used an evidence in the count of law and should not be used in any advertising media without prior written permission.
  4. Sampling not done by us, unless specified.



# SLN TESTING LABORATORY PRIVATE LIMITED

Recognized by MOEF & CC , ISO 9001:2015 , ISO14001:2015 ,  
ISO 45001:2018 & GLP Certified Laboratory



NO.23, JDN Layout, 10<sup>th</sup> Cross , Raghavendra Industrial Area , Thigalarapalya Main Road,  
Peenya 2<sup>nd</sup> Stage , Bengaluru - 560058, Karnataka, India.

Mob : 9538888098 , 9538888097, E - mail: info@slnlabs.com , Web : www.slnlabs.com

## TEST REPORT

Page No. 1 of 1

<b>Report No :</b> SLNLT2600201523	<b>Report Date :</b> 20/02/2026
<b>Issued To:</b> M/s. MSR IT 144, 2JRF+RGJ Doctor, 144, Outer Ring Rd, MS Ramaiah North City, Manayata Tech Park, Nagavara, Bengaluru, Karnataka 560045.	<b>Customer Reference :</b> Verbal
	<b>Date of Receipt :</b> 16/02/2026
	<b>Date of test start :</b> 16/02/2026
<b>Vendor Name:</b> M/s. Brookfield Technologies Pvt. Ltd. Bangalore.	<b>Date of Completion of test :</b> 20/02/2026
	<b>Sample Particulars :</b> STP Treated Water-250 KLD

Sl. No	Parameters	Test Method	Units	Results	KSPCB Standard
01	pH Value	IS:3025/Part-11	---	7.35	6.5 - 9.0
02	Total Suspended Solids	IS:3025/Part-17	mg/L	13.6	20 Max
03	Biochemical Oxygen Demand (3days @27°C)	IS:3025/Part-44	mg/L	6.8	10 Max
04	Chemical Oxygen Demand	IS:3025/Part-58	mg/L	36.9	50 Max
05	Total Nitrogen	IS:3025/Part-34	mg/L	7.6	10 Max
06	Ammonical Nitrogen	IS:3025/Part-34	mg/L	1.3	5 Max
07	Fecal Coliform	IS 1622-1981	MPN/100ml	50	100 Max

**Inference:** As per KSPCB Standards, The above tested results are within the standards.

\*\*\*\*\*End of the Report\*\*\*\*\*



Authorised Signatory

- Note :**
1. The results listed pertain only to the tested samples and applicable parameters.
  2. Samples will be destroyed after 15 days from the date of issue of test certificates unless & otherwise specified and all perishable samples will be destroyed immediately after tests conducted.
  3. This report is not be reproduced either wholly or in part and can not be used an evidence in the count of law and should not be used in any advertising media without prior written permission.
  4. Sampling not done by us, unless specified.